

ASSA WP Padlock

ASSA[®]
ASSA ABLOY

Weather resistant padlock

ASSA ABLOY, the global leader
in door opening solutions



Application

WP is ASSA's new range of high-tech padlocks designed for harsh weather conditions around the world.

The locks have unique characteristics to withstand the most extreme rigors of time without being affected.

WP stands for Weather Proof.

With the sealing O-rings at the shackle, the cylinder and the keyway an ASSA WP padlock is weather proof. This means that the locks can hang out in the rain and wind, the inside is just as dry. The lock also has a good resistance to corrosion and meets the highest standards for corrosion resistance.

Features

- Shackle in Boron steel
- Padlock body in steel WP2 and hardened steel WP3 and WP4
- Chrome finish
- IP68 Rated
- Fulfill requirements of: EN 12320 grade 3/4/5
SSFN 014 class 1/2/3/4
- Included in the insurance companies approved lock unit
- Designed for alternative cylinder types
- Fits into Master Key Systems
- Sealed lock cylinder
- Key -locking design
- Operating Temperatures: -40° F to +130° F
-40° C to +80° C
- Comes with alternate shackle heights, see dimensional drawing and table on the next page

Weather resistant padlock

ASSA ABLOY, the global leader in door opening solutions



Function


ASSA WP padlock is ideal for use with CLIQ[®] or CLIQ[®] Remote technologies. With CLIQ[®] you combine mechanical lock technology with an electromechanical encrypted code.

CLIQ[®] Remote is unique and can be used anywhere, even when the padlock is placed in harsh environments. It is also possible to get ASSA WP padlocks with other Master key systems from ASSA.

Weather resistance

IP68 – fully dust tight, withstands continued immersion in water

IP (International Protection) indicate how well an item is protected against dust and water ingress. The first digit indicates the degree of protection provided against the intrusion of foreign objects and dust, the second digit indicates water resistance. The IP68 designation awarded to ASSA[®] WEATHER PROOF (WP) padlocks indicates a hermetic seal.

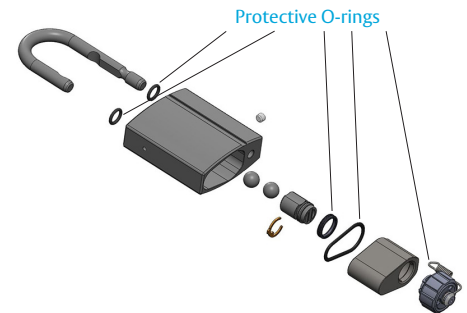

ASSA WP Hänglåsclasser

WP Padlock Class 2 GRADE 3 Locking of hatches and gates in protection class 1 och 2 Locking of industrial gates and sheds Locking of containers Locking with approved chain Electromechanical security with CLIQ [®] Remote		57 mm chrome-plated steel housing Dual lever shackle in chrome-plated Boron steel Shackle diameter: Ø 8 mm Shackle height 25 mm or 50 mm IP68 Certified
WP Padlock Class 3 GRADE 4 Locking of hatches and gates in protection class 1 to 3 Locking of industrial gates and sheds Locking of containers Locking with approved chain Electromechanical security with CLIQ [®] Remote		72 mm chrome-plated steel housing Dual lever shackle in chrome-plated Boron steel Shackle diameter: Ø 10 mm Shackle height 25 mm or 50 mm IP68 Certified
WP Padlock Class 4 GRADE 5 Locking of hatches and gates in protection class 1 to 4 Locking of industrial gates and sheds Locking of containers Locking with approved chain Electromechanical security with CLIQ [®] Remote		72 mm chrome-plated steel housing Dual lever shackle in chrome-plated Boron steel Shackle diameter: Ø 14 mm Shackle height 25 mm or 50 mm IP68 Certified

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA AB
P.O. Box 371
SE-631 05 Eskilstuna
Sweden

Phone +46 (0)16 17 70 00
Fax +46 (0)16 17 70 49

Customer support:
phone intl. +46 (0)16 17 71 00
Phone nat. 0771-640 640
Fax +46 (0)16 17 73 72
e-mail: helpdesk.marknad@assaabloy.com

www.assa.se