
ASSA ABLOY Desmo+8920



Cam Lock



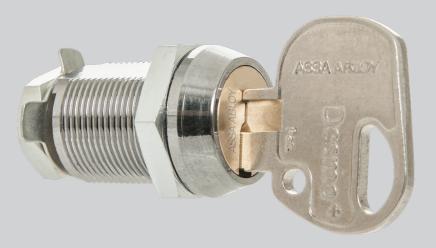

Performance

ASSA ABLOY Desmo $^{\scriptscriptstyle +}$ is a high security cylinder design based on direct driven pins.

ASSA ABLOY Desmo $^+$ 8920 is an 8-pin camlock to be used on doors with 16/19 hole and up to 16mm thickness.

The ASSA ABLOY Desmo⁺ 8-pin design allows master keying and the technology creates a high number of differs.

Cylinders are made of nickel plated brass and the keys of nickel silver. Drill protection and double key entry is available on request.

ASSA ABLOY standard catches can be used.

Function

The key turns 90° and can only be removed when the catch is in the locked position. Double key entry is available on request.

Right hand turning as standard and left hand available on request.



We reserve the right to correct any printing errors and update the information after printing.


M1440.1808 Artnr 702406


ASSA ABLOY Desmo+8920

ASSA ABLOY Opening Solutions


Cam Lock

Dimension (mm)





Hole preparation



Included in part no: 492370

Part	Part no.	Material	Finish
Large nut	492262	Steel	Zinc plated
Small nut	490583	Steel	Zinc plated
Stop washer	492291	Brass	Nickel plated
Locking washer	490246	Steel	Zinc plated

Keys

Keys together with lock 492366 Extra keys 492373

Notes

Catch Preparation:

- Locking up or down = horizontal hole in catch
- Locking right or left = vertical hole in catch

Cylinder house: Nickel plated brass Cylinder: Brass

Accessories see data sheet "Accessories" Catches see data sheet "Catches" Spare parts see data sheet "Spare Parts"

ASSA ABLOY Opening Solutions Sweden P.O. Box 371 SE-631 05 Eskilstuna Sweden

Phone +46 (0)16 17 70 00 Fax +46 (0)16 17 70 49

Customer support: Phone intl. +46 (0)16 17 71 00 Phone nat. 0771-640 640 Fax +46 (0)16 17 73 72

e-mail: helpdesk.se.openingsolutions@assaabloy.com www.assaabloyopeningsolutions.se